

Embossing inspection stamps

from left: PHSG 3, PHSG 2, PHSG 1, HSG 1, HSG 2



PHSG 1, 2 and 3

pneumatic hand stamp appliances

Small, compact and easy-to-use

This hand stamp appliance can be used particularly well for embossing inspection stamps and hallmarks.

The engraved extension (letter, figure, special character or company logo) can be interchanged and is assembled torque-proof.

HSG 1 and 2


manual hand stamp appliances

The perfect solution for manually embossing inspection stamps.

- Interchangeable, engraved extension
- Adjustable marking force (11-22kg)
- Head with plastic protection cap
- Nickel-plated body
- Can also be delivered as a centre punch with cone point
- Up to 2mm for steel
- Up to 4mm for aluminium
- Number of characters: 1-3

Technical data PHSG

	PHSG 1	PHSG 2	PHSG 3
Number of characters:	1-3	1-5	1-8
Character height:	2-4 mm	2-4 mm	2-6 mm
Striking rate:	ca. 10 kN	ca. 20 kN	ca. 40 kN
Pressure:	2 bar	2-6 bar	2-6 bar
Length:	184 mm	245 mm	350 mm
Weight (approx):	0,6 kg	1,0 kg	1,6 kg

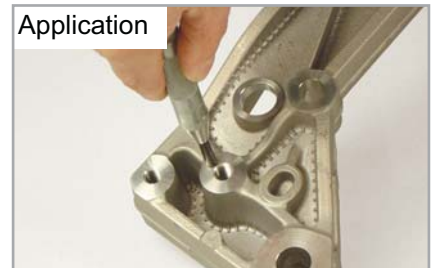

More stamping tools on www.gima-ib.de